



Alfa Laval MultiMagnum

Rotary spray head tank cleaning device for low-flow cleaning in hygienic applications

Intro

The Alfa Laval MultiMagnum is a rotary spray head tank cleaning machine for hygienic environments. Designed to clean tanks from 5 - 40 m³.

The Alfa Laval MultiMagnum minimizes the consumption of water and cleaning media. Easy to customize to meet customer requirements, the MultiMagnum allows companies to spend less time cleaning and more time producing.

Application

The Alfa Laval MultiMagnum is designed for the removal of residues from hygienic tanks across the dairy, brewery, distillery, beverage, food, IBC (intermediate bulk container), personal care and many other industries.

Benefits

- 40% faster cleaning = more time for production
- Saves up to 40% of your cleaning cost
- Dynamic cleaning performance and 360° full wetting
- Easy to retrofit traditional spray balls to a more economical solution
- Can be installed at any angle

Standard design


Different choice of spray pattern suitable for various applications and tank designs, ranging from simple tanks to more complex tanks with structure such as agitator and baffles. The MultiMagnum is lubricated by the cleaning media.

Working principle


The flow of the cleaning media causes the head of the Alfa Laval MultiMagnum to rotate, and the fan-shaped jets layout a swirling pattern throughout the tank or reactor. This generates the wetting/impact needed for the efficient removal of the residual product; the cascading flow covers all internal surfaces of the vessel.




Spray Pattern



360°



270° up



180° down

Certificates

2.1 material certificate.



TECHNICAL DATA

Lubricant:	Self-lubricating with the cleaning fluid
Wetting radius:	Max. 3 m
Impact cleaning radius:	Max. effective 2 m

Pressure

Working pressure:	1-3 bar
Recommended pressure:	2 bar

PHYSICAL DATA

Materials

Inlet connections/Balls:	316 (UNS S31600)
Bearing race parts:	Duplex steel (UNS S31803)
Head:	316 (UNS S31603)

* FDA compliance 21CFR§177

Surface finish

Standard Surface finish:	Ra 0.8µm exterior/ Ra 0.8µm internal
exterior:	Ra 0.8µm
internal:	Ra 0.8µm

Temperature

Max. working temperature:	95°C
Max. ambient temperature:	140°C

Weight

Thread:	0.90 kg
On pipe:	2.5 kg


Connections

- Thread: 1 1/4" Rp (BSP) or NPT
- Weld-on: 1 1/2" ISO 2037 or DN40 DIN11850-R2


Caution

Avoid hydraulic shock, hard and abrasive particles in the cleaning liquid, as this can cause increased wear and/or damage of internal mechanisms. In general, a filter in the supply line is recommended. Do not use for gas evacuation or air dispersion. For steaming we refer to the manual.

Flow Rate

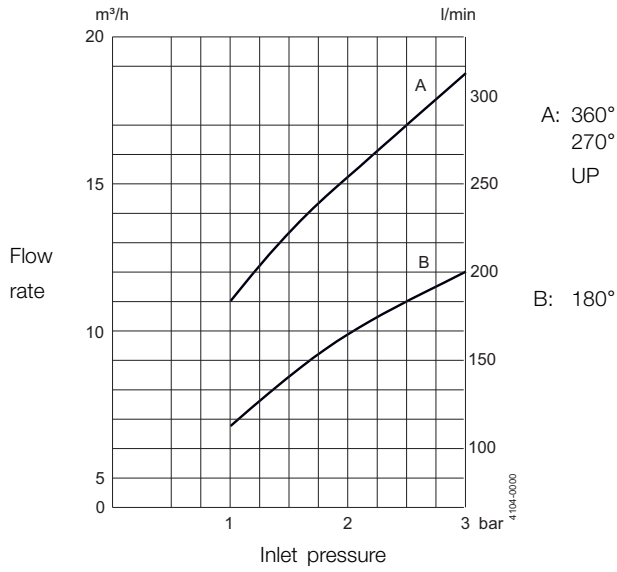


Cleaning radius

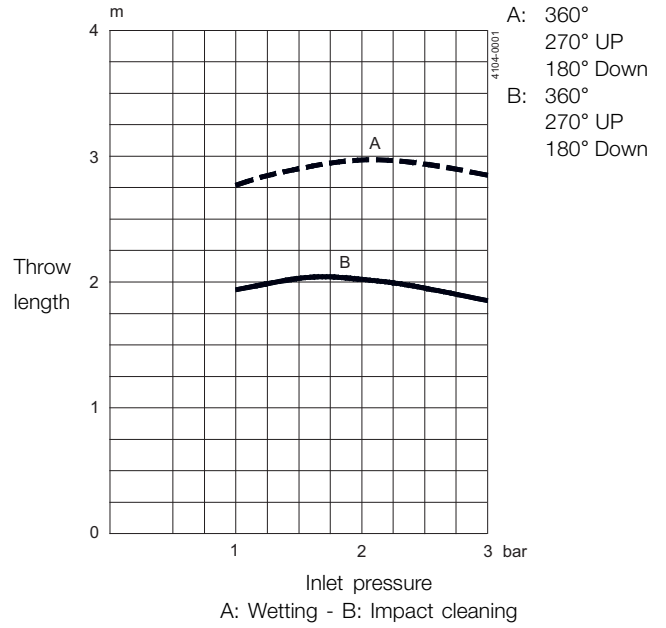

Dimensions (mm)


Thread

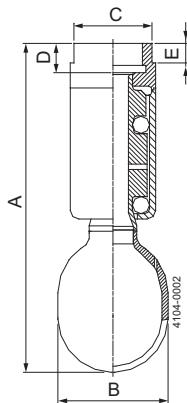

TH
1 1/4" Rp (BSP)

1 1/4" NPT

Weld-on

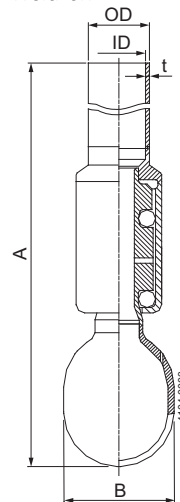

OD x t
Welded on

pipe
ISO: $\varnothing 38 \times 1.2$ mm
DIN Range 2: $\varnothing 41 \times 1.5$ mm

Type	A	B	C	D	E
Thread	183	$\varnothing 65$	46	16	15
Weld-on	1000	$\varnothing 65$			

Alfa Laval reserves the right to change specifications without prior notification.

How to contact Alfa Laval

Contact details for all countries
are continually updated on our website.
Please visit www.alfalaval.com to
access the information direct.